GENERAL NOTES - CONSTRUCTION PLANS

1. DIMENSIONING:
   - A. ALL CMU WALLS ARE DIMENSIONED FACE TO FACE.
   - B. ALL STUD WALLS ARE DIMENSIONED CENTERLINE TO CENTERLINE OF STUD.
   - C. ALL EXTERIOR WALLS ARE DIMENSIONED TO EXTERIOR FACE OF MASONRY OR EXTERIOR FACE OF STUD.
   - D. ALL OPENINGS WITHIN A MASONRY WALL ARE DIMENSIONED TO THE MASONRY OPENING.
   - E. ALL OPENINGS WITHIN A STUD WALL ARE DIMENSIONED TO CENTERLINE OF OPENING.
   - F. COORDINATE ALL FOOTINGS, PIERS, SLABS, AND DETAILS WITH STRUCTURAL DRAWINGS AND SPECIFICATIONS.
   - G. UNLESS OTHERWISE NOTED, INTERIOR DIMENSIONS ARE TO CENTERLINE OF STUD.
   - H. INTERIOR DIMENSIONS TO DEMISING PARTITIONS ARE TO CENTERLINE OF OVERALL PARTITION.
   - I. INTERIOR DIMENSIONS TO THE EXTERIOR WALL ARE TO THE OUTSIDE FACE OF STUD/OUTSIDE FACE OF FOUNDATION
   - J. ALL HOLD DIMENSIONS TO BE ADHERED TO UNLESS PERMISSION IS EXPRESSED BY ARCHITECT IN SKETCH OR WRITING. WHERE HOLD DIMENSIONS CANNOT BE MET IN FIELD, IT MUST BE BROUGHT TO ATTENTION OF ARCHITECT PRIOR TO CONTINUING CONSTRUCTION.
   - K. ALL CLEAR DIMENSIONS TO BE COORDINATED WITH FIXTURES & EQUIPMENT.
2. BLOCKING TO BE PROVIDED FOR ALL WALL MOUNTED MILLWORK AND FF&E, AND TO BE COORDINATED WITH FF&E SPECIFICATIONS AND LOCATIONS SHOWN.
3. ALL PENETRATIONS THROUGH RATED WALLS, FLOORING SYSTEM(S), SLAB(S), ETC, SHALL BE FIRE STOPPED AND SEALED WITH AN APPROVED SEALANT AND/OR CONSTRUCTION METHOD TO MAINTAIN THE INTEGRITY OF RATINGS.
4. ALL SOFFITS TO BE CONSTRUCTED BELOW RATED ASSEMBLY.
5. PROVIDE ADEQUATE & CONCEALED FIRE RATED BLOCKING AND REINFORCED WALL ASSEMBLIES RECEIVING MILLWORK / FF&E OF ANY NATURE FOR STRUCTURALLY SOUND CONDITIONS. REFER TO BLOCKING.
6. COORDINATE THE INSTALLATION OF ALL DECORATIVE ART, MIRRORS, DECORATIVE LIGHTING, ETC.
7. REFER TO A-140'S FOR FLOORING FINISH / PATTERN INSTALLATION.
8. REFER TO A-900'S FOR ROOM FINISH SCHEDULE & FINISH SPECIFICATIONS.
9. TYPICAL UNIT PLANS ARE ANNOTATED ON LEVEL 2.
10. REFER TO FOR FLOOR TRANSITION DETAILS.

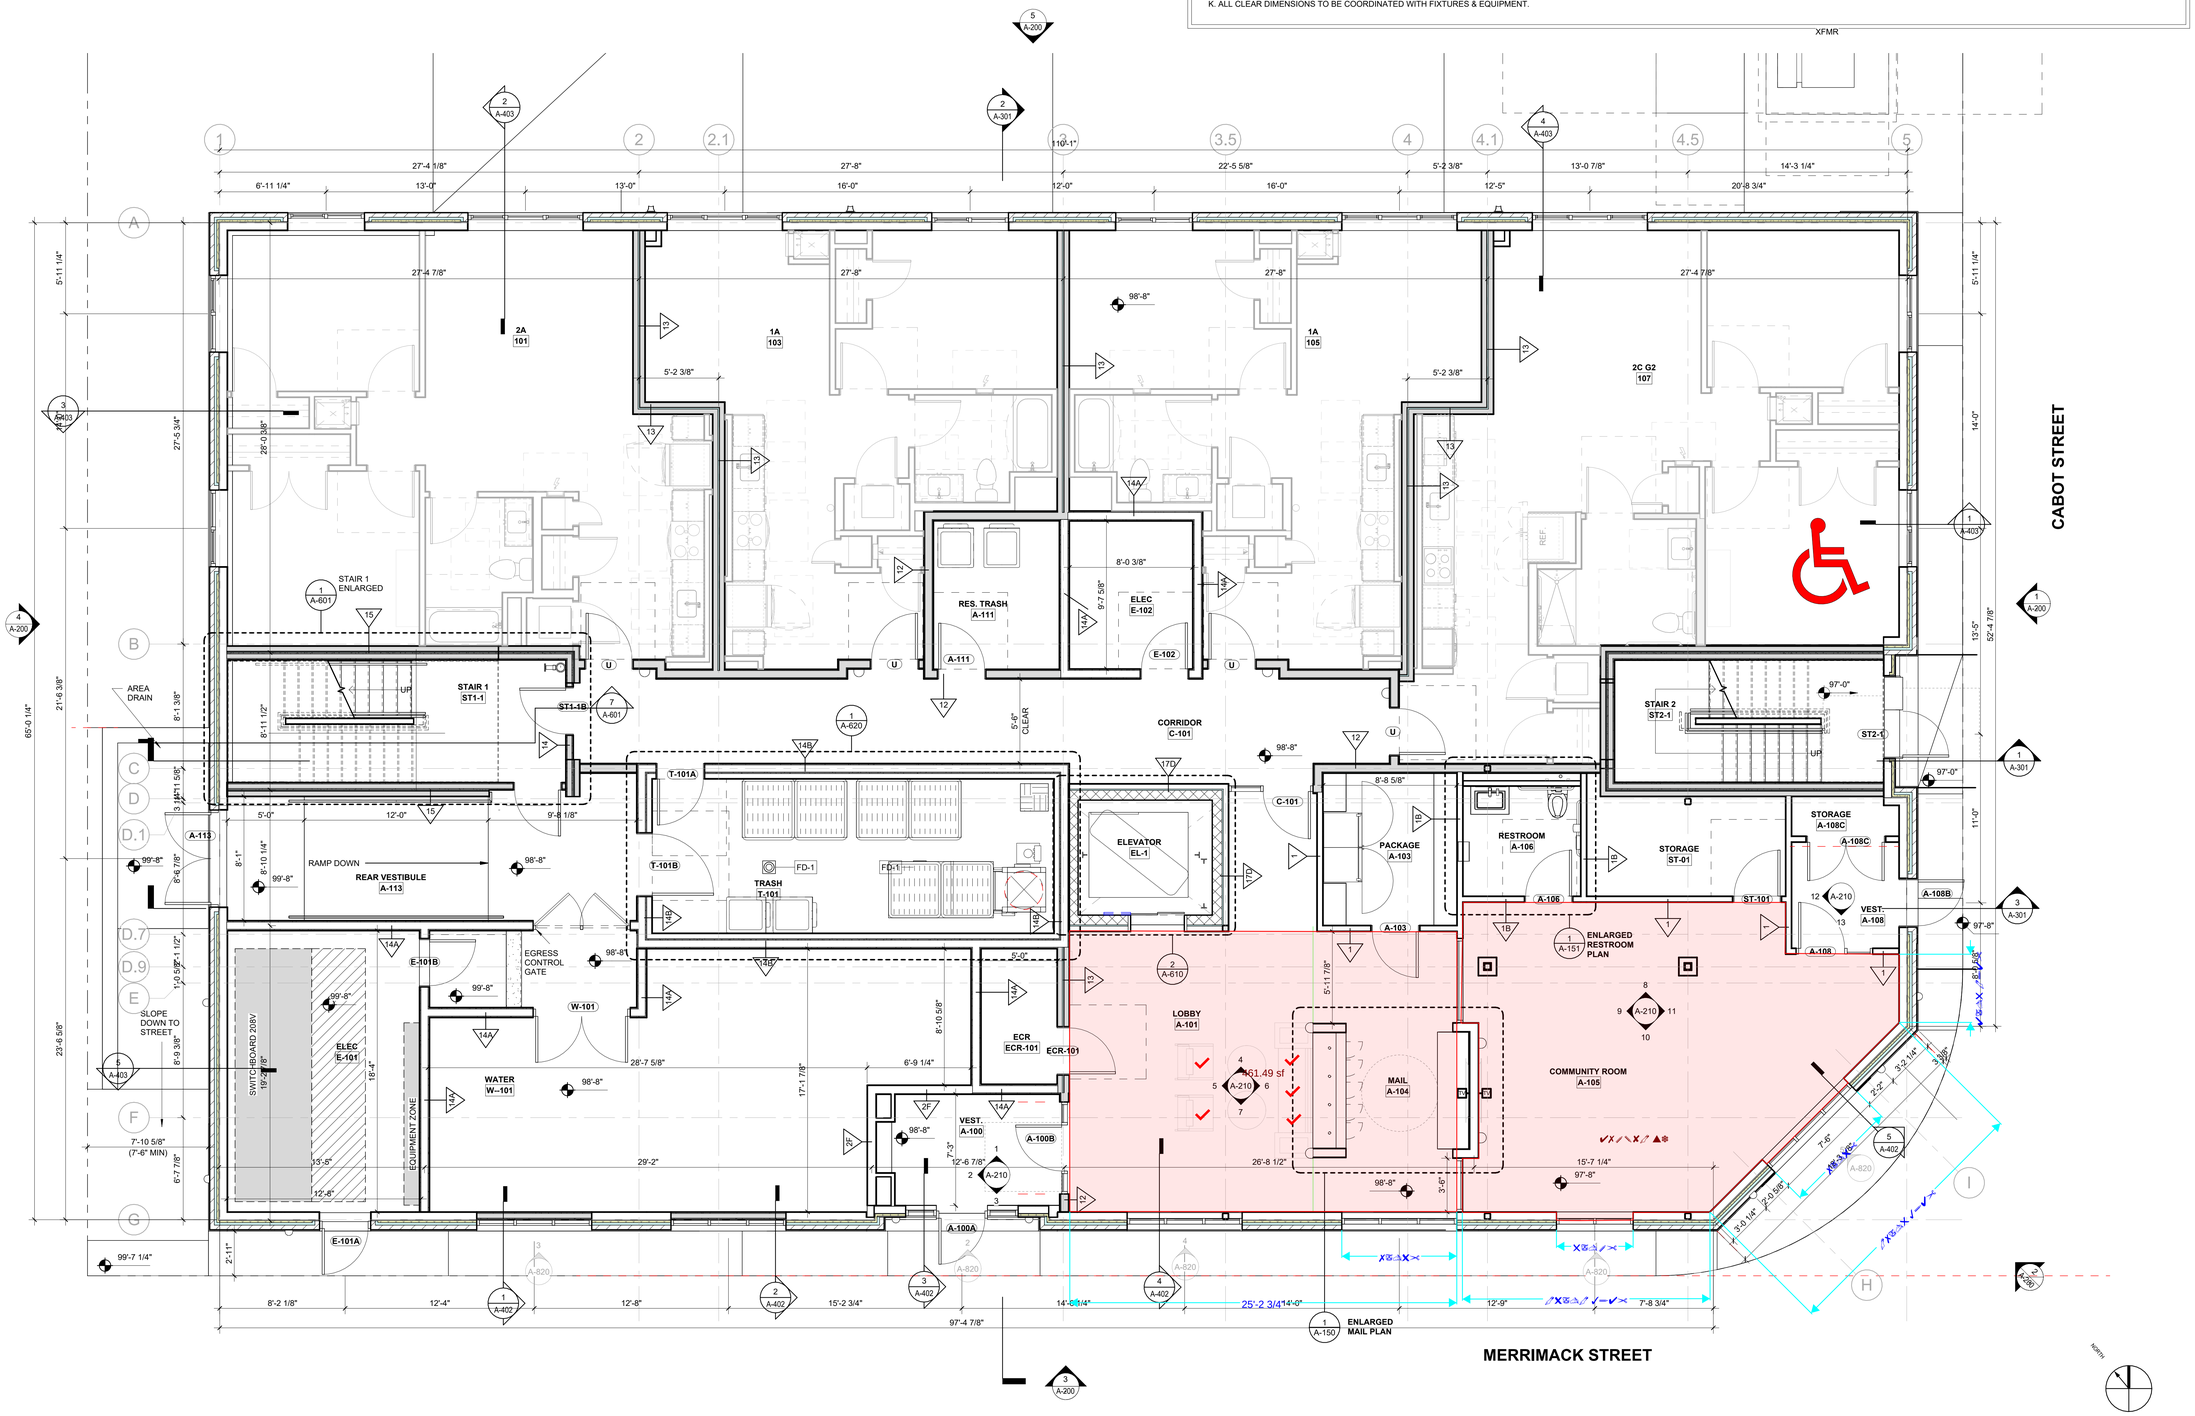

1 LEVEL 1 FLOOR PLAN
1/4" = 1'-0"

CABOT - MERRIMACK CORRIDOR DEVELOPMENT

681-701 MERRIMACK STREET

TRINITY FINANCIAL

ARCHITECT

E-ICON ARCHITECTURE
141 TREMONT ST BOSTON, MA 02111

CONSULTANT

STAMP

KEY PLAN

NO.	DATE	DESCRIPTION
2	04-30-2026	PERMIT SET
1	12-20-2024	EOHLC SUBMISSION

PROJECT NUMBER: 224017.000
DRAWN BY: LF,CM
CHECKED BY: GF

SHEET TITLE

FLOOR PLAN - LEVEL 1

A-101

3/20/2026 4:36:22 PM